

WISAP®

INSUFFLATION

WARM GAS INSUFFLATORS /
GAS HEATING MODULES / ACCESSORIES




WISAP® Quality made in Germany

WARM GAS INSUFFLATION

THE KEY TO PREVENTING HYPOTHERMIA

WISAP® PIONEER IN INSUFFLATION

Over the past 40 years WISAP has developed over seven generations of insufflators and has significantly promoted the high standard in the field of insufflation of today. Our family of insufflators is the result of decades of experience and represents our commitment to quality.

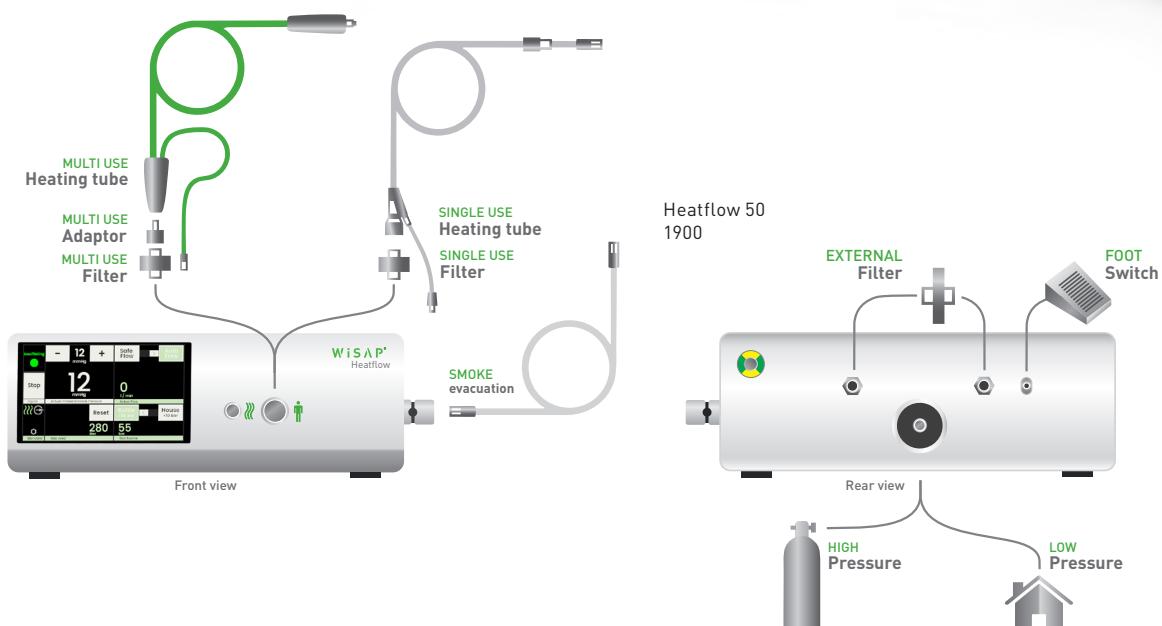

HIGH QUALITY HEATING HOSES MULTI-USE AND SINGLE-USE

CO₂- GAS HEATING

The use of pre-warmed CO₂ gas has shown to reduce the post-operative pain-killer need by 30%. As we believe in the benefits of CO₂ gas heating, all our models are equipped with this feature.



HEATING TUBE SINGLE-USE



HEATING TUBE MULTI-USE

HEATFLOW

HEATFLOW

High-Performance CO₂-Insufflator (50l/min) with integrated gas heating and smoke-evacuation

- 50 liter High flowrate
- CO₂ gas heating system
- Three patient modes: Pediatric, Standard, Bariatric
- Integrated smoke evacuation system
- Flow adjustable algorithm
- Safety overpressure valve
- Intuitive user interface



CO₂-GAS HEATING

SAFETY-RELIEF VALVE

SMOKE-EVACUATION

NEGATIVE PRESSURE GAUGE

TECHNICAL DATA

Max. gas flow:	50 l/min
Pressure range:	3-30 mmHg
Gas connection:	CO ₂ -US-Standard
Mains voltage:	100-240 V / 50/60 Hz
Power input:	Heatflow with smoke evacuation 140 Va
Casing:	Stainless steel, aluminium / white coated
Dimensions:	w x h x d = 350 x 130 x 360 mm
Weight:	app. 8 kg

ORDER DATA

HEATFLOW

1900

CO₂-Insufflator 50 l with smoke evacuation each with one single-use heating hose, gas filter (to bottle- / house-connection), gas filter (to patient), filter adaptor for multi-use heating hose, tubing-set for smoke-evacuation, foot-switch for smoke evacuation

TETRAFLATOR 45

Tetraflator 45

High-Performance CO₂-Insufflator with integrated gas heating and smoke-evacuation (optional)

- 45 liter flowrate
- integrated gas heating
- optimal pressure control
- Neonatal-/bariatric-mode
- CO₂ supply with gas-bottle or central
- optical/acoustic warnings at excess pressure
- pressure relief valve



TECHNICAL DATA

Max. gas flow:	45 l/min
Pressure range:	3-30 mmHg
Gas connection:	CO ₂ -US-Standard
Mains voltage:	100-240 V / 50/60 Hz
Power input:	Tetraflator Standard 100 VA Tetraflator with smoke evacuation 140 VA
Casing:	Stainless steel, aluminium / white coated
Dimensions:	w x h x d = 350 x 130 x 360 mm
Weight:	app. 8 kg

ORDER DATA

TETRAFLATOR 45

7085L45T	CO ₂ -Insufflator 45 l each with one single-use heating hose, gas filter (to bottle- / house-connection), gas filter (to patient), filter adaptor for multi-use heating hose
7085L45TSE	CO ₂ -Insufflator 45 l with smoke evacuation each with one single-use heating hose, gas filter (to bottle- / house-connection), gas filter (to patient), filter adaptor for multi-use heating hose, tubing-set for smoke-evacuation, foot-switch for smoke evacuation

TETRAFLATOR 30

Tetraflator 30

MID-RANGE CO₂-Insufflator with gas heating and smoke-evacuation (optional)

- 30 liter flowrate
- integrated gas heating
- optimal pressure control
- Neonatal-/bariatric-mode
- CO₂ supply with gas-bottle or central
- optical/acoustic warnings at excess pressure
- pressure relief valve



TECHNICAL DATA

Max. gas flow:	30 l/min
Pressure range:	3-30 mmHg
Gas connection:	CO ₂ -US-Standard
Mains voltage:	100-240 V / 50/60 Hz
Power input:	Tetraflator Standard 100 VA Tetraflator with smoke evacuation 140 VA
Casing:	Stainless steel, aluminium / white coated
Dimensions:	w x h x d = 350 x 130 x 360 mm
Weight:	app. 8 kg

ORDER DATA

TETRAFLATOR 30

7085L30T	CO ₂ -Insufflator 30 l each with one single-use heating hose, gas filter (to bottle- / house-connection), gas-filter (to patient), filter adaptor for multi-use heating hose
7085L30TSE	CO ₂ -Insufflator 30 l with smoke evacuation each with one single-use heating hose, gas filter (to bottle- / house-connection), gas filter (to patient), filter adaptor for multi-use heating hose, tubing-set for smoke-evacuation, foot-switch for smoke evacuation

TETRAFLATOR 20

Tetraflator 20

Low-Cost CO₂-Insufflator with gas heating

- 20 liter flowrate
- integrated gas heating
- optimal pressure control
- Neonatal-/bariatric-mode
- CO₂ supply with gas-bottle or central
- optical/acoustic warnings at excess pressure
- pressure relief valve

CO₂-GAS HEATING

SAFETY-RELIEF VALVE

TECHNICAL DATA

Max. gas flow:	20 l/min
Pressure range:	3-30 mmHg
Gas connection:	CO ₂ -US-Standard
Mains voltage:	100-240 V / 50/60 Hz
Power input:	Tetraflator Standard 100 VA
Casing:	Stainless steel, aluminium / white coated
Dimensions:	w x h x d = 350 x 130 x 360 mm
Weight:	app. 8 kg

ORDER DATA

TETRAFLATOR 20

7085L20T

CO₂-Insufflator 20 L each with one single-use heating hose, gas filter (to bottle- / house-connection), gas filter (to patient), filter adaptor for multi-use heating hose

CO₂-GAS HEATING-MODUL

Flow Therme

Separate gas heating modul, adaptable to any cold-gas insufflator.

In the course of an operative endoscopy a few hundred liters of CO₂-gas can be insufflated. Because of the size of the peritoneal surface and the resulting evaporative-cooling it results in cooling of the abdominal cavity (temperature in the abdominal cavity to <32° C).

This can cause a peritoneal catarrh which leads in turn to post-operative pain of the diaphragm and the shoulder.

After 3 years of studies it could be shown that by using gas heated up to body temperature, the postoperative use of analgesics was significantly reduced.

The CO₂-gas is heated up by the WISAP FLOW THERME.

FITS ALL COLD GAS
INSUFFLATORS

FITS TO
7642 HS + 7642 HSE



TECHNICAL DATA

Mains voltage:	Standard: 230 V-50 Hz Please indicate other requested voltages when ordering.
Power input:	55 VA
Dimensions:	w x h x d = 150 x 80 x 170 mm
Casing:	Stainless steel, aluminium / white coated
Weight:	2,2 kg

ORDER DATA

FLOW THERME

7642

Flow Therme, for heating up insufflation gas to body temperature
incl. accessories: Mains cable



ORDER DATA

VERESS-NEEDLE



L mm	Veress-Needle, modular system consisting of: Needle body with stopcock, spring holder, insufflation tubing, Incision cannula
100 mm	7160 W
120 mm	7160 W1
150 mm	7160 W3

ACCESSORIES



	Heating tube (multi-use)
7642HS	L = 2,75 m / autoclaveable / adaptor for gas-heating / LL adaptor to Veress needle or trocar



	Heating tube (single-use) (Pack)
7642HSE1 7642HSE10	WISAP / L = 2,75 m / LL adaptor to Veress needle or trocar / 10 pcs. p.pck. Olympus / L = 2,75 m / LL adaptor to Veress needle or trocar / 10 pcs. p.pck.



	Smoke Evacuation
7085AS	Single Use tubing for smoke evacuation. Only in combination with insufflation devices equipped with smoke evacuation system



	Filter, sterile (pack)
7070TFW2	For CO ₂ -gas-exit / 50 pcs. p. pack



	System adaptor
7050AG	Adaptor 1 piece



	Adaptor without filter
7070TA	For heating-tube multi use (7642HS) / 1 piece



	Filter extern 1 piece
1900FE	For CO ₂ -connection (back side of unit)



	Filter extern 1 piece
7085FE	For CO ₂ -connection (back side of unit)



	foot-switch
7085FS	foot-switch for smoke evacuation control

CO₂-INSUFFLATOR - ACCESSORIES

ORDER DATA

CO₂-CONNECTION-TUBING FOR INSUFFLATORS

Gas-source

Unit fitting



9919

PIN-Index ⌄ ⌅ US [HIGH-PRESSURE]

CO₂-connection-tubing (HIGH-P), bottle (PIN-index) - device (PIN-index) / L = 1 m

9919-1

Germany ⌄ ⌅ US [HIGH-PRESSURE]

CO₂-connection-tubing (HIGH-P), bottle (D) - device (US) / L = 1 m

9919-3

Italy ⌄ ⌅ US [HIGH-PRESSURE]

CO₂-connection-tubing (HIGH-P), bottle (Italy) - device (US) / L = 1 m

9912-6

Italy ⌄ ⌅ US [LOW-PRESSURE]

CO₂-connection-tubing (LOW-P), central (Italy) - device (US) / L=5m

9912-4

Germany ⌄ ⌅ US [LOW-PRESSURE]

CO₂-connection-tubing (LOW-P), central (D) - device (US) / L = 4 m

CONTACT US

PERSONAL NOTES

YOUR PERSONAL CONTACT PERSON

Distribution company

WISAP Medical Technology GmbH

Fichtenstraße 27
D - 85649 Brunnthal/Hofolding
Tel. +49(0)81 04/8908-10
Fax. +49(0)81 04/8908-90
www.wisap.de · info@wisap.de

WISAP®